


FIG. 159 ADJUSTABLE ROD BEAM CLAMP

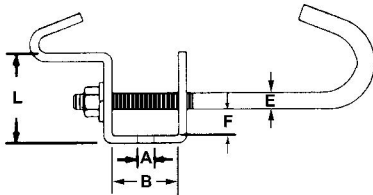

Material: Carbon steel.

Finish: Plain or electro-galvanized.

Service: Designed to be used in the suspension of a hanger rod from an I-beam. Recommended for flange widths from 4 inches minimum to 8 inches maximum.

Approvals: Complies with Federal Specifications WW-H-171-E (Type# 54), A-A-1192 A (Type# 27), and MSS SP-58 and SP-69 (Type# 27).

Ordering: Specify rod size, figure number and finish.

SIZE A	MATERIAL	FLANGE WIDTH		B	E	F	L	WEIGHT EACH (lbs)	MAX REC LOAD (lbs)
		MIN	MAX						
$\frac{3}{8}$ -16	3ga x $1\frac{1}{4}$	$3\frac{1}{2}$	8	2	$\frac{3}{8}$	1	$2\frac{3}{4}$	0.98	300
$\frac{1}{2}$ -13	3ga x $1\frac{1}{2}$	$3\frac{1}{2}$	8	2	$\frac{1}{2}$	$\frac{15}{16}$	$2\frac{3}{4}$	1.38	700
$\frac{5}{8}$ -11	3ga x $1\frac{3}{4}$	$3\frac{1}{2}$	8	2	$\frac{5}{8}$	$\frac{7}{8}$	$2\frac{3}{4}$	1.86	1000