


**FIG. 25L  
EXTENDED C-CLAMP WITH LOCKNUT**

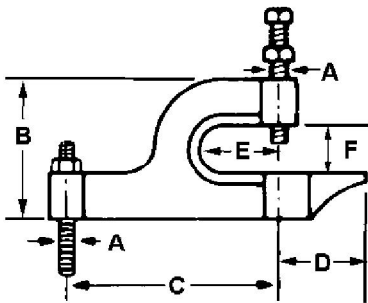

**Material:** Ductile iron.  
**Finish:** Plain, electro-galvanized.  
**Service:** Designed for attachment to beams where flange thickness does not exceed  $\frac{3}{4}$ " and where it is desired to have the rod support offset from the beam.  
**Ordering:** Specify figure number and finish.  
**Notes:** See MSS SP-69 for proper set screw torque recommendations.

SIZE A	SET SCREW	B	C	D	E	F	WGT EACH (lbs)
$\frac{3}{8}$ -16	$\frac{3}{8}$ -16 X 2	2.362	3.600	1.515	1.000	0.787	0.716